

## Technical Specifications

<b>Power supply</b>	110 ... 230VAC, 50/60Hz
<b>Standby power</b>	max. 500mW
<b>Power loss at max. load</b>	2.3W
<b>Output</b>	protective contact socket outlet (single-pole switched with internal relay, bistable) total load max. 10A (Plug Type J) total load max. 13A (Plug Types E, F, G)
<b>Interfaces</b>	Loxone Air: 868MHz (SRD Band Europe), 4 channels available 915MHz (ISM Band Region 2), 10 channels available max. Power 3.16mW
<b>Ambient temperature</b>	-20 ... 35°C / -4 ... 95°F
<b>Humidity</b>	max. 95% r.H. (non condensing)
<b>Temperature detection range</b>	-40 ... 125°C / -40 ... 257°F; +/- 0.5°C / 0.9°F
<b>Power detection range</b>	0 ... 4kW
<b>Energy detection range</b>	0 ... ∞kWh
<b>Learn button</b>	can also be used as a push button

# LOXONE

## Need Help?

[loxone.com/support](https://loxone.com/support)

Loxone Electronics GmbH  
Smart Home 1  
4154 Kollerschlag  
Austria

[loxone.com](https://loxone.com)



V060420

# LOXONE



## Smart Socket Air

Part No: 100120 Plug Type E  
Part No: 100115 Plug Type F  
Part No: 100121 Plug Type G  
Part No: 100119 Plug Type J

## About the product

The Smart Socket Air gives you simple and convenient wireless control of devices and appliances.

With an in-built temperature sensor and power monitor, you can easily keep track of how much energy your appliances are using, and switch them off remotely via the Loxone app.

## Features

- Freely programmable relay output
- Power and energy measurement
- Temperature sensor

## Installation

The installation of the device has to be carried out by a qualified person. The device has to be fitted in accordance with building regulations for electrical and fire safety. If the device is not installed according to manufacturers guidelines the protection of the device may be affected.

Prior to the installation it's important to read our online documentation.

When the Smart Socket Air is first plugged in, learning mode will be activated for 10 minutes or until the device has been successfully paired with a Miniserver using Loxone Config.

This folder is a part of the product!



For additional information, declaration of conformity, visit [www.loxone.com/help/smart-socket-air](http://www.loxone.com/help/smart-socket-air)

## Information

Contains FCC ID: COR-ZWIR4512AC1

This device complies with part 15 of the FCC Rules.


Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation


## Technical Specifications

<b>Safety Rating</b>	IP30
<b>Dimensions</b>	106x53.8x29.5mm / 4.17x2.12x1.16" (LxWxH) (without plug)
<b>Maintenance &amp; Cleaning</b>	This device is free of maintenance and may only be cleaned with a dry cloth.


Plug Type E

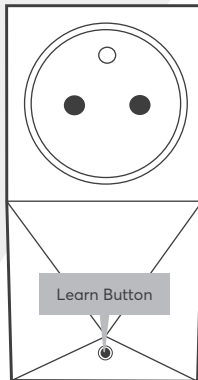

Plug Type F

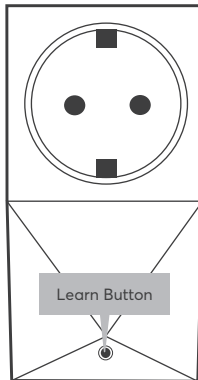

Plug Type G

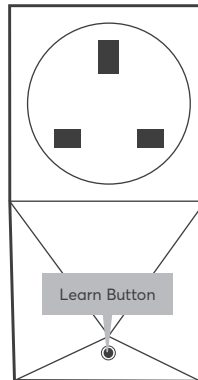

Plug Type J

